


SRQ-358

MiFare Series R/W Module

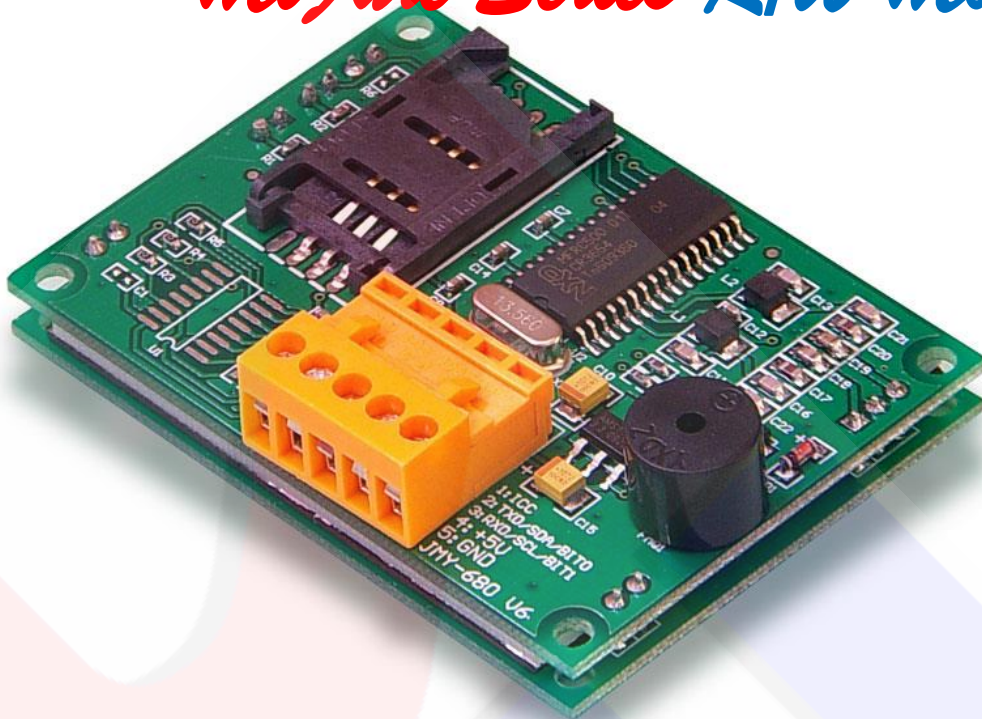

RFID Enabling Reader

Specification:

RF Cards	ISO 14443-A Mifare 1K/4K
Frequency	13.56 MHz
Interface	RS-232
Distance	Up to 70mm
LED/Buzzer	Available
Power	DC 5V \pm 10% ; 150mA
Dimensions	50mm x70mm x10mm (WxLxH)
OS	Win-XP/Vista/Win-7&8/Linux /Android
Certification	CE EMC EN55022 (Class B)

Features:

- Read/Write MiFare RF card (1K/4K/Ultralight)
- RS-232 interface
- RF card can be detected upon entering reading range.
- Build-in memory for MiFare authentication key storage.
- Build in 512 byte EEPROM for user data storage.
- Antenna board is built-in on the back side of main PCB.
- Buzzer/LED (for power and read-card indicators)
- One SAM Module(ISO-7816 SIM Card)

